



Replacing the Media for the US Water
GreenWave NSS Salt-Free Water
Softener Alternative

What's Included:

GW100-REBED

- 3 Liters NSS TAC Media
- Funnel
- 1g Silicone Lubricant
- Plastic Riser Tube Cap

GW150-REBED

- 5 Liters NSS TAC Media
- Funnel
- 1g Silicone Lubricant
- Plastic Riser Tube Cap

GW200-REBED

- 7 Liters NSS TAC Media
- Funnel
- 1g Silicone Lubricant
- Plastic Riser Tube Cap

Caution: If you have a combo system including a Bodyguard Filter, make sure to determine which tank is the GreenWave Salt-Free System by checking the sticker on the tank.

Note: The riser tube may or may not be fixed inside the tank depending on the model. Follow all the directions below if your model has a removable riser tube. If your model has a fixed riser tube, disregard the first note below and leave the riser tube as-is.

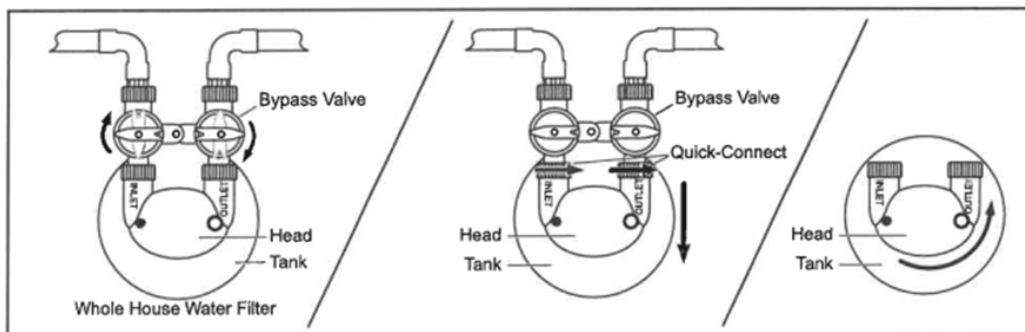


Figure 1

1. Turn the arrows on the Bypass Valve as shown to place the Bypass Valve into bypass mode.
2. Unscrew the Quick-Connects on the tank side of the Bypass Valve, leaving the Bypass Valve connected to the plumbing. Unscrew and remove the head from the tank.
3. Pour the expired NSS media from the tank. It may be necessary to use a water hose to wash the wet media from the inside of the tank. Dispose of the expired media with normal household debris.



Figure 2

Note: If your tank has a removable riser tube, when removing the expired media from the tank the riser tube inside the tank may be flushed out of the tank along with the expired media. If this occurs, pull the tube all the way out and put it aside until the expired media is fully removed from the tank. If the riser tube does not come out during the process, disregard this note and skip to step 5.

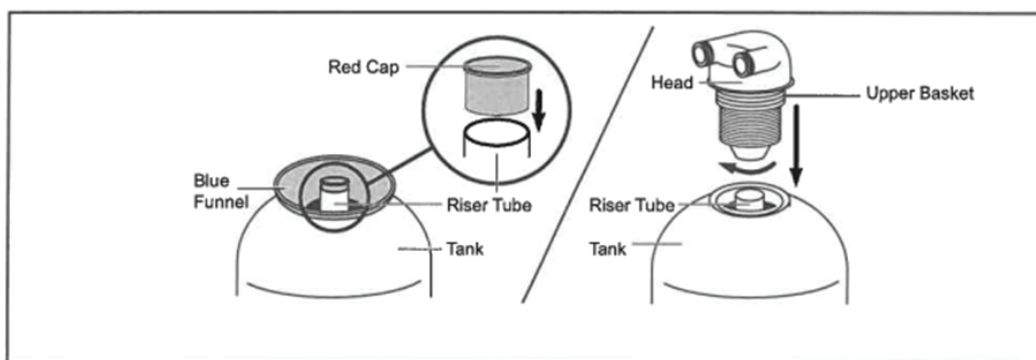


Figure 3

4. Once the expired media is removed, reinstall the riser tube inside the tank with the attached lower basket on the bottom and the open tube facing up.

5. The riser tube will rest in the center of the bottom of the tank. Cover the top of the riser tube with the provided plastic cap, then pour the replacement media into the tank with the provided funnel.
6. Once the media is replaced, if possible, pour enough water to cover the media inside the tank and allow it to soak for 30 minutes.
7. Remove the plastic cap from the top of the riser tube and fit the riser tube into the bottom of the upper basket attached to the head.
8. Push down to screw the head back onto the tank hand tight

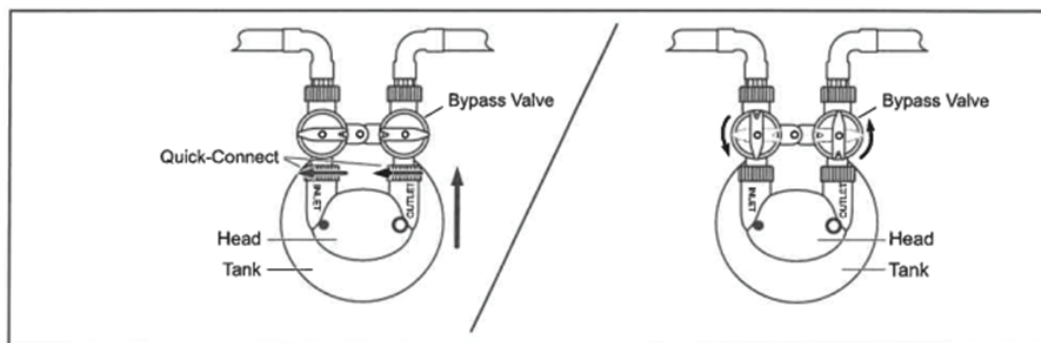


Figure 5

9. Install the tank head back onto the Bypass Valve hand-tight all the way to the tabs.
10. Slightly crack open the inlet valve and outlet to allow water to fill into the tank, you want to fill enough water into the tank to get above the level of the new media (if not done in step 6.)
11. Leave the Bypass Valve in the bypass position and let the new media soak for 30 minutes.
12. After the media has soaked, slowly turn the arrows on the Bypass Valve back to their original positions.
13. Go to the closest hose bib or faucet and run the water for 30 minutes or so to flush out **any** discoloration from the new media. It is recommended you remove the aerator if flushing from a faucet to keep any media fines from plugging the faucet.